

## LIGHTING INSTRUCTIONS

1. Ensure all burner knobs are in the OFF position. Connect the hose assembly to the natural gas source.

Check all connections & hoses for leaks with a soap and water solution.

2. CAUTION: If hood is being used, open before attempting to light the grill.
3. Turn the “red” crossover ignition burner control knob (*see Figure 5*) to the HI position. Allow 3-5 seconds for natural gas to flow into the burner, and then press the igniter button several times to light the burner.

If the burner fails to light with the igniter button after several attempts, turn the gas off, and wait five (5) minutes. Turn on the gas and use long reach butane lighter or long match to light through the ignition hole located on the right hand side of the grill body (*see Figure 5*).

4. Once the crossover burner is lit, any main burner may be lit by simply turning the control knob for each burner to the HI position.

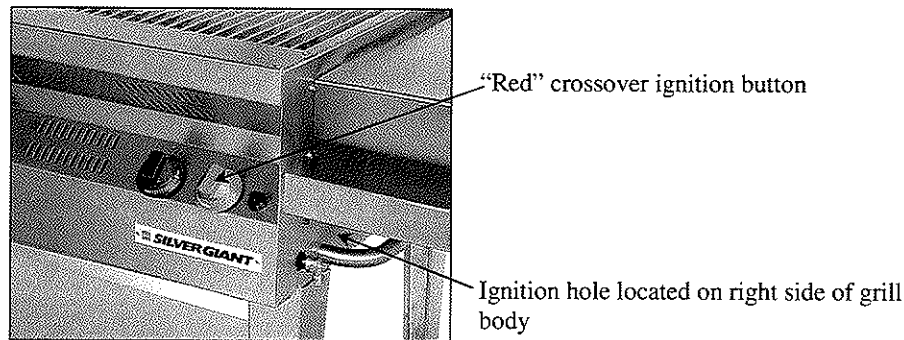


Figure 5

5. Pre-Heating your BBQ - because our BBQ's have such high BTUs, it is important that the operator only have the Main Gas Valves on the HIGH position for 10 minutes maximum. If the operator doesn't follow these instructions, he/she may cause permanent damage to the BBQ and will not be warranted by the manufacturer

## SHUT-DOWN

1. Close the natural gas source and allow burners to burn any remaining gas in the line and manifold.
2. Turn all the control valves to the OFF position.